


GENERAL DATA	
MODEL NUMBER	RTAA100
NOMINAL TONS	100
REFRIGERANT	R-22
REFRIGERANT CHARGE	50LB/50LB
WATER CONNECTION SIZE	4 IN.
AMBIENT OPERATING CONDITIONS	0-115 F
CHILLED WATER SETPOINT LIMITS	0-65 F
NUMBER OF ELECTRICAL CIRCUITS	1
NUMBER OF REFRIGERANT CIRCUITS	2
ELECTRICAL DATA	
VOLTAGE	460V
MINIMUM CIRCUIT AMPACITY W/O PUMP	220 AMPS
MINIMUM CIRCUIT AMPACITY W/ PUMP	250 AMPS
MINIMUM KW FOR GENERATOR SIZE	200KW
POWER CONNECTION TYPE	CAM-LOCK
WATER FLOW RATES	
PUMP SIZE	20 HP
MINIMUM GPM FLOW	120 GPM
STANDARD GPM FLOW	240 GPM
MAXIMUM GPM FLOW	360 GPM
MAXIMUM WATER PRESSURE	150 PSI
DIMENSIONS	
LENGTH	20 FT
WIDTH	8 FT 5 IN.
HEIGHT	9 FT
WEIGHT	12,500 LBS

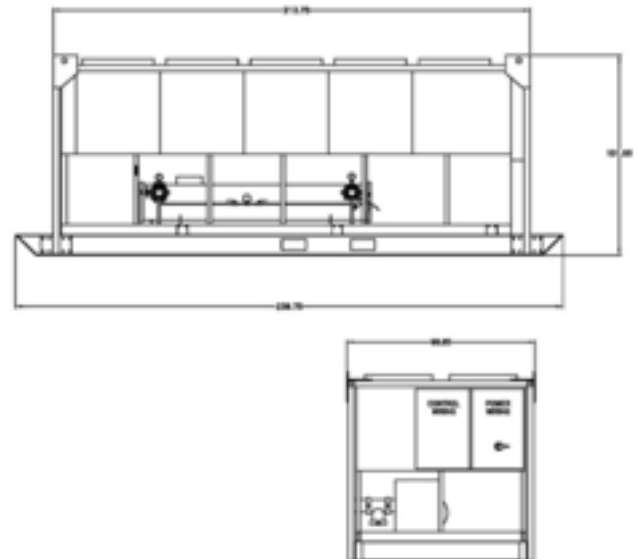

**800.368.6302**

[www.idsdrying.com](http://www.idsdrying.com)