



AIR-COOLED CHILLER 200 TON

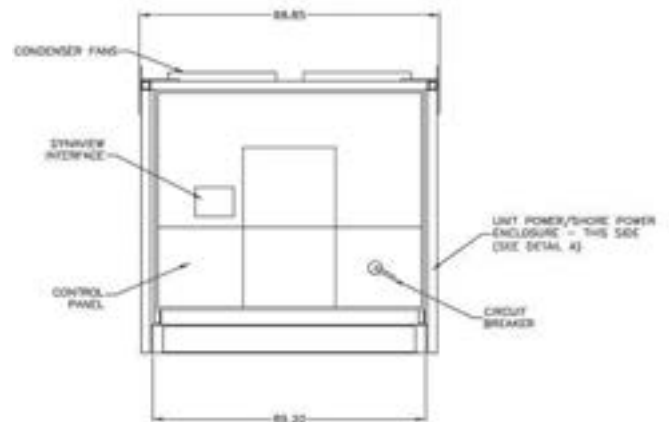

GENERAL DATA	
MODEL NUMBER	RTAC200
NOMINAL TONS	200
REFRIGERANT	R-134a
REFRIGERANT CHARGE	225LB/225LB
WATER CONNECTION SIZE	6 IN.
AMBIENT OPERATING CONDITIONS	0-115 F
CHILLED WATER SETPOINT LIMITS	20-65 F
NUMBER OF ELECTRICAL CIRCUITS	1
NUMBER OF REFRIGERANT CIRCUITS	2
ELECTRICAL DATA	
VOLTAGE	460V
MINIMUM CIRCUIT AMPACITY W/O PUMP	420 AMPS
MINIMUM CIRCUIT AMPACITY W/ PUMP	460 AMPS
MINIMUM KW FOR GENERATOR SIZE	450KW
POWER CONNECTION TYPE	CAM-LOCK
WATER FLOW RATES	
PUMP SIZE	25 HP
MINIMUM GPM FLOW	240 GPM
STANDARD GPM FLOW	470 GPM
MAXIMUM GPM FLOW	880 GPM
MAXIMUM WATER PRESSURE	150 PSI
DIMENSIONS	
LENGTH	25 FT
WIDTH	8 FT 5 IN.
HEIGHT	9 FT
WEIGHT	18,400 LBS

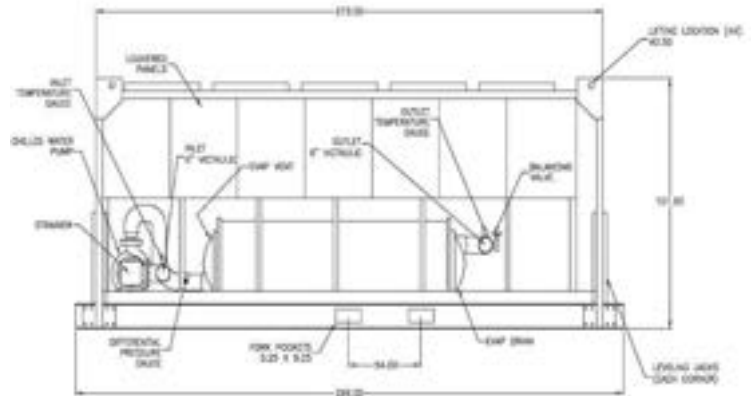

800.368.6302

www.idsdrying.com